

CM SERIES

HEAVY DUTY THERMAL PRINTING MECHANISMS

MAIN FEATURES


- Paper width: 60/80/82.5/112mm
- 200dpi (8dots/mm) printing resolution
- Paper thickness from 55 to 120gsm
- Autoloading capability
- Aluminium structure
- Printing speed from 120 to 150mm/sec
- Frontal or back paper in
- Silicon rubber paper feeding roll
- Paper feed motor with high couple
- Possibility to manage labels too



CM60



CM82.5

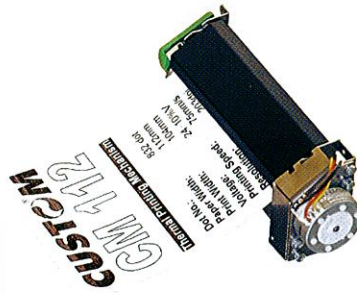

CM112



CM82.5 kit configuration

MOST COMMON APPLICATIONS

- Inspection and security system
- Cash register/ Balances
- Measurement tools
- Portable tools

AVAILABLE VERSIONS

- CM60 60mm 24Vdc
- CM60 60mm 24Vdc vertical mounting
- CM82,5 82,5mm 24Vdc
- CM112 112mm 24Vdc
- CM112 112mm 24Vdc vertical mounting



Optional Rewinder AV05

| | CM60 | CM80 | CM82.5 | CM112 |
|-----------------------|-------------------|-----------------|-----------------|-----------------|
| PRINTING METHOD | THERMAL DOT LINE | | | |
| NUMBER OF DOTS | 448 | 576 | 640 | 832 |
| RESOLUTION | 8 DOT/MM-203 DPI | | | |
| PAPER WIDTH: (MM) | 60 | 80 | 82.5 | 112 |
| PRINT WIDTH: (MM) | 56 | 72 | 80 | 104 |
| PRINTING SPEED | >150 MM/SEC | >140 MM/SEC | | |
| POWER SUPPLY | 24VDC | | | |
| DIMENSIONS MM (WXDXH) | 108,6X60,2X40,9 | 128,6X60,2X40,9 | 151,1X60,2X40,9 | 160,6X60,2X40,9 |
| WEIGHT | 264 G | 294 G | 300 G | 340 G |
| HEAD LIFE | 50KM/ 100M PULSES | | | |

CONTROL BOARDS




CM BOARD

CUTTERS



58/60mm



80/82.5mm



112mm

